

8100

ImagePro 8100 Ultra Short Throw LCD Projector




CEILING MOUNT

The ImagePro 8100 features a short throw distance to allow placement where user shadow does not affect image viewing

FEATURES

- 2500 Lumens Brightness
- XGA Resolution
- Large filter with side access
- Ultra short 4 to 31 inch throw
- Monitor Loopthrough
- Built-in Anti-theft security
- Dynamic room-filling sound from 7-watt speaker
- No shadow/No glare

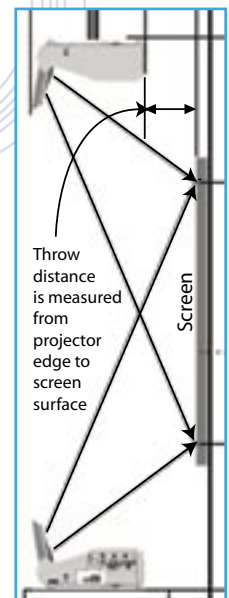

FLOOR MOUNT

THE ALL NEW

DUKANE

Education. Presentation. Inspiration.

www.dukcorp.com/av




ConVA by Dukane delivers control of classroom audio visual assets in sync with our Student Response System. Experience tomorrow's classroom today with ConVA. Visit www.convashsystems.com.

Call Dukane: 800-676-2485

IMAGEPRO 8100 ULTRA SHORT THROW LCD PROJECTOR

Back Panel

Connections

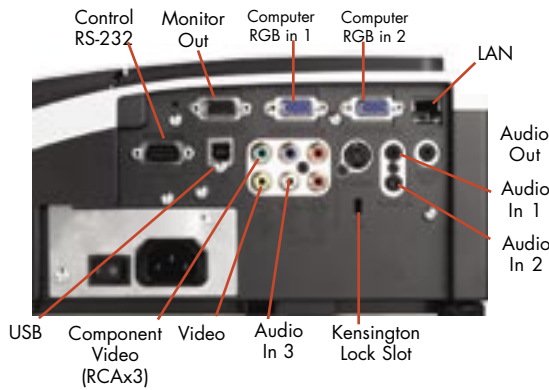

FEATURES

- Ultra Short (4 to 31 inch) throw distance
- XGA (1024 x 768) resolution
- 2500 ANSI lumens of brightness
- Large filter with side access
- Monitor Loophrough
- Built-In Anti-theft security
- Room-filling sound from 7W speaker
- Ceiling or floor mount
- No shadow /No glare



DIAGONAL	WIDTH	THROW DISTANCE	VERTICAL OFFSET
INCHES	INCHES	INCHES	INCHES
60	48	4	11
70	8	7	13
80	64	10	14
90	72	13	15.5
100	80	16	17
120	96	22	20
150	120	31	24

DUKANE

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
800-676-2485
630-584-5156
avsales@dukcorp.com
www.dukcorp.com/av

ImagePro is a registered trademark of Dukane Corporation
#11700-L-06



toll-free
fax
e-mail

Specifications

8100

Image Element	0.63" polysilicon active-matrix TFT x3
Brightness	2500 ANSI lumens (2000 lumens in Whisper Mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	500:1
Scanning Frequency	fh 15 -106 kHz, fv 50-120 Hz
Lens	Fixed
Lens Throw Ratio	SEE TABLE THIS PAGE
Keystone Correction	Digital, vertical +/-5 deg
Aspect Ratio	4:3, 16:9 selectable
Computer Compatibility	SVGA, VGA, XGA, SXGA, UXGA MAC13" and MAC16"
Video Compatibility	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, HDTV (1080i, 720p, 576i, 480i/p)
Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	220W UHB
Lamp Life	2000 hours (typical) 3000 hours (whisper mode)
Audio	1 speaker 7 watt
Throw Distance	4" to 31"
Screen Size, diagonal	60" to 150"
Inputs, Video	(1) Component, RCA x 3 (1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1
Inputs, Computer	(2) RGB, 15 pin D-sub
Inputs, Audio	(2) Stereo mini jack: for PC/Access. (1) RCA x 2 (for video)
Outputs, Audio	(1) Stereo mini jack, adjustable
Ethernet	RJ-45 Port/100 Base-T
Outputs, Monitor	RGB, 15 pin D-sub
Outputs, Control	RS-232, 9 pin D-sub USB (Mouse control)
Security	Kensington lock slot & Security Bar
Fan Level	39dB, ultra quiet; 34dB Whisper Mode
Operating Temperature	41-95 deg F
Power	AC 100-120V, AC 220-240V 50/60 Hz, 320 watt
Size (WxHxD)	15.6" x 5.2" x 14.0"
Weight	12.8 lbs.
CARTON (WxHxD)	22" X 9.5" X 19"
Shipping Weight	24 lbs.
Accessories Included	Remote control, batteries, power cord, RGB cable, RCA video cable and operators manual.
Safety	UL/C-UL, FCC Class B
Optional Accessories	Lamp 456-8100 Ceiling Mount, Universal; RPM-U Filter; QD60122

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year *Peace-of-Mind Loaner Program*.

5YR